



THIS ESC HAS DOUBLE-SIDED LARGE-PITCH PADS, WHICH IS GOOD FOR SOLDERING



FRONT

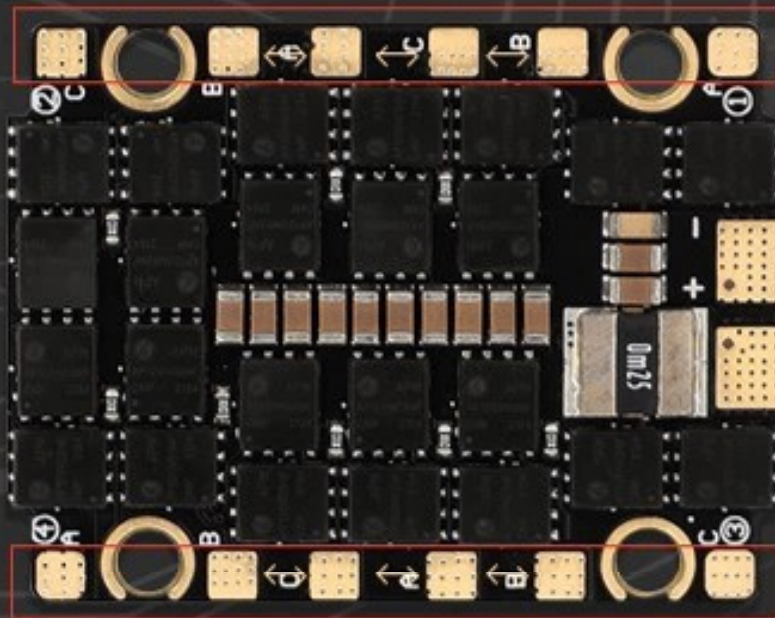

BACK

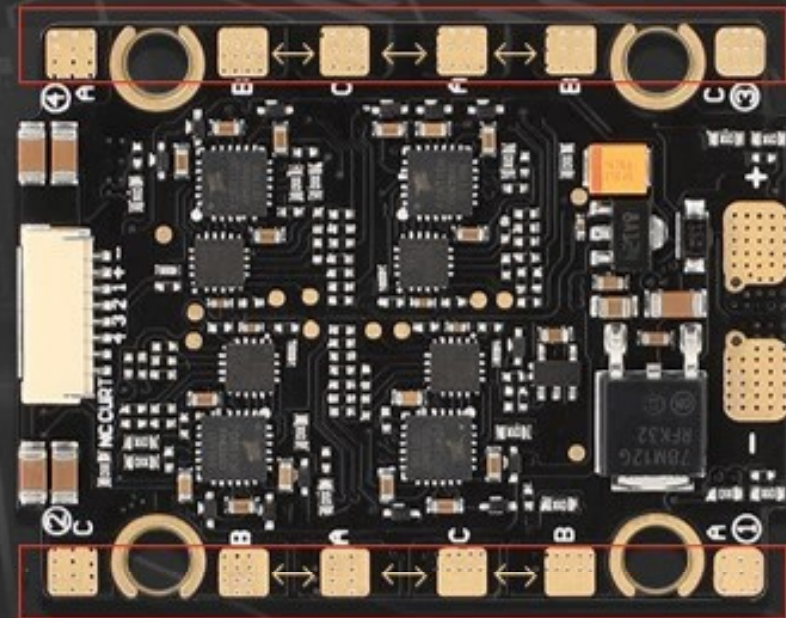

CONNECTION DIAGRAM

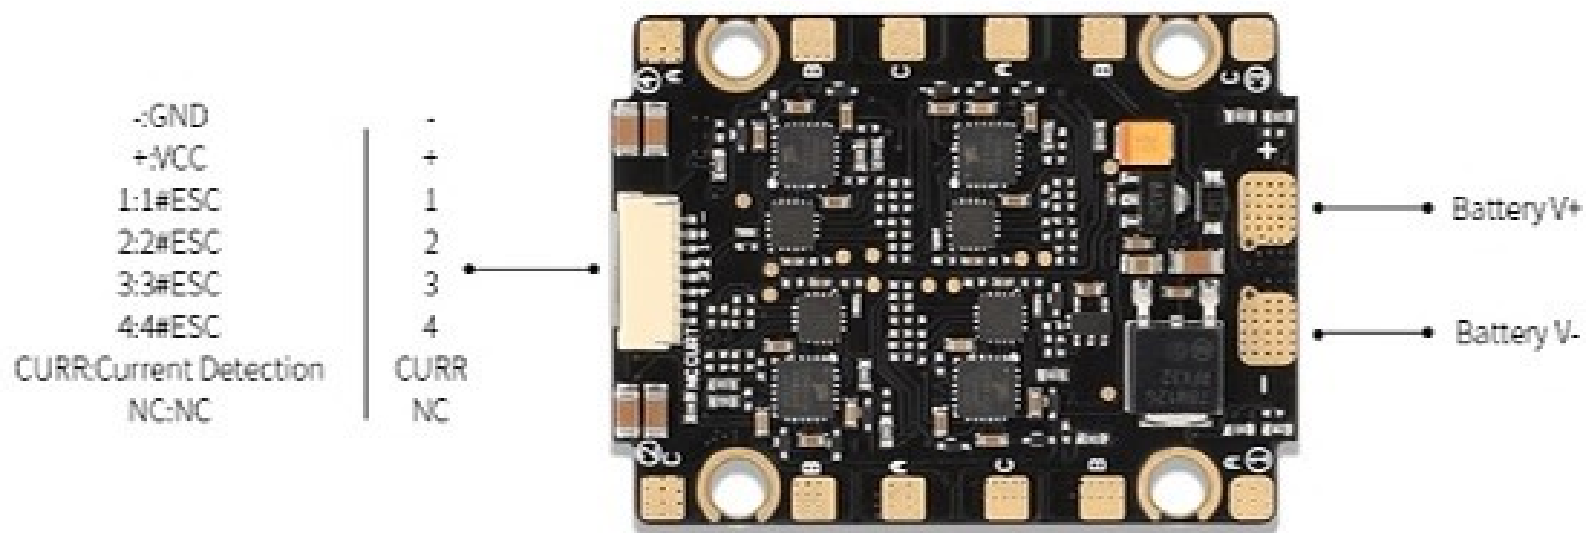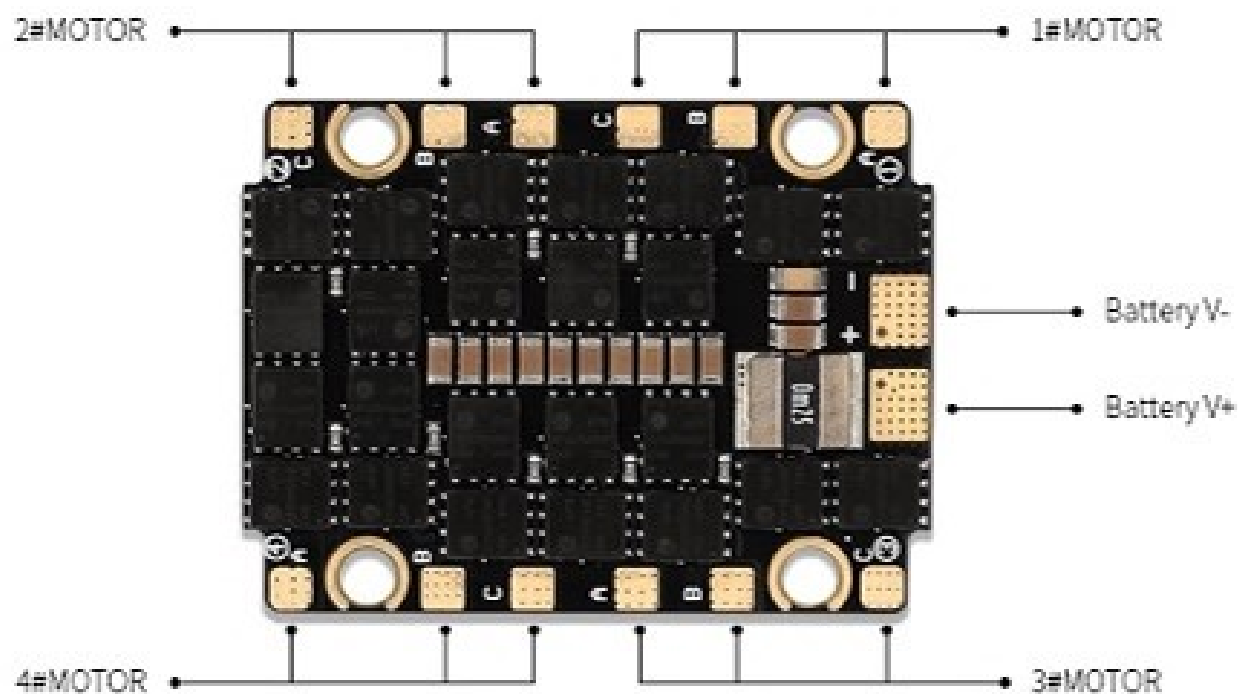

ACCESSORIES



ESC X1



XT60 power cable X1



Silicone shock-absorbing washer X8



Connection wire X1



Sticker X2



Capacitor X1



QC PASS card X1

The background of the slide is a dark, high-contrast photograph of a printed circuit board (PCB). It shows various electronic components such as capacitors, integrated circuits, and surface-mount components, with intricate copper traces visible. The lighting is dramatic, highlighting the textures and shapes of the components against a dark background.

SPEC

Input Voltage: 3-6S

Current: 4*45A

Max Current: 4*55A

Amperage Meter: 200

ESC Software: BLS

Weight: 13g

ESC Mounting Hole: 30.5mm