






Item No.	Volts (V)	Prop	Throttle	Amps (A)	Watts (W)	Thrust (G)	RPM	Efficiency (G/W)	Operating temperature(°C)
MN2206 KV2000	11.1	T-MOTOR 5*3	50%	3.3	38	195	13600	5.13	20
			65%	4.1	47	233	14500	4.96	
			75%	4.6	52	256	15600	4.92	
			85%	5.5	63	297	16600	4.71	
			100%	6.6	74	340	17700	4.59	
		T-MOTOR 6*2	50%	3.5	41	255	13000	6.22	28
			65%	4.8	54	326	13900	6.04	
			75%	5.4	61	362	14800	5.93	
			85%	6.7	76	435	16000	5.72	
			100%	8.1	90	499	17000	5.54	
		T-MOTOR 7*2.4	50%	4.5	52	330	10800	6.35	40
			65%	6.2	69	420	12000	6.09	
			75%	8.2	91	515	13000	5.66	
			85%	10.5	116	610	13900	5.26	
			100%	12.8	138	700	14600	5.07	
	7.4	T-MOTOR 7*2.4	50%	2.8	22	183	7800	8.32	23
			65%	3.8	29	230	8700	7.93	
			75%	4.4	33	260	9500	7.88	
			85%	6	45	325	10500	7.22	
			100%	7	52	372	11000	7.15	
		T-MOTOR 8*2.7	50%	3.5	27	219	6700	8.11	30
			65%	4.9	36	285	7600	7.92	
			75%	6.2	46	346	8400	7.52	
			85%	8	60	428	9200	7.13	
			100%	9.9	70	478	9700	6.83	

Notes:The test condition of temperature is motor surface temperature in 100% throttle while the motor run 10 min.

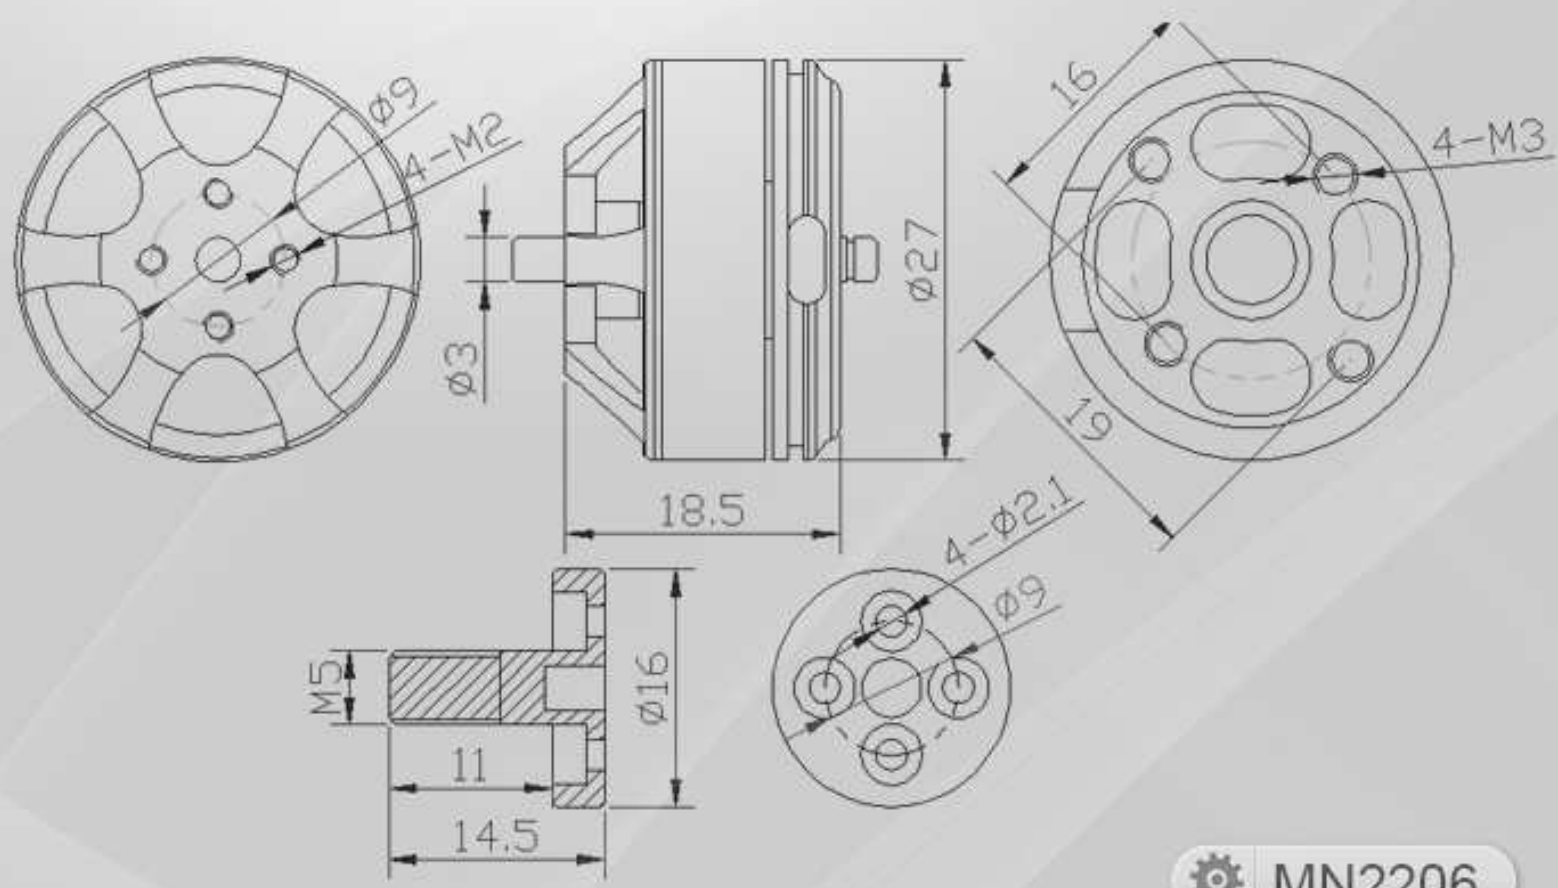



T-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS



T-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS



T-MOTOR
HIGH PERFORMANCE BRUSH-LESS MOTORS



T-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS



MN NAVIGATE SERIES

Small Size Member

lightweight with maximum payload
longest flight time for Pocket(Mini) Drone.
High quality materials and components



SMALL SIZE MEMBER MN2200

Standard packing: Included 2 sets of Prop adapter

NEW ♡



1. Included 4MM prop adapter can directly support installation of M4 screw propeller.

