




**FEIYU  
TECH.**

## **FY-20A FLIGHT STABILIZATION SYSTEM INSTALLATION & OPERATION MANUAL**



**Guilin Feiyu Electronic Technology Co., Ltd**

Rm. B305, Innovation Building, Information Industry Park, Chaoyang Road, Qixing District,

Website: [www.fyotech.com](http://www.fyotech.com)

Email: [feiyudz@hotmail.com](mailto:feiyudz@hotmail.com)


*Dear Pilot,*

Thank you for purchasing the FY-20A stabilizer from FeiYu Tech.

In order to achieve full potential and safe operation of this product, please carefully read this manual prior to installation.

**Warning:**

- The installation and use of this device require some skill and knowledge in flying remote controlled fixed wing aircraft.
- If you are a new to the hobby and have never flown one before, we do not recommend you install this device on your own.
- Please find assistance from an experienced flier who may provide you with the basic knowledge required to use this device successfully.
- If you are already an experienced flier, you will find the installation to be easy and logical. Just follow the instructions as stated in this manual and you won't go wrong.

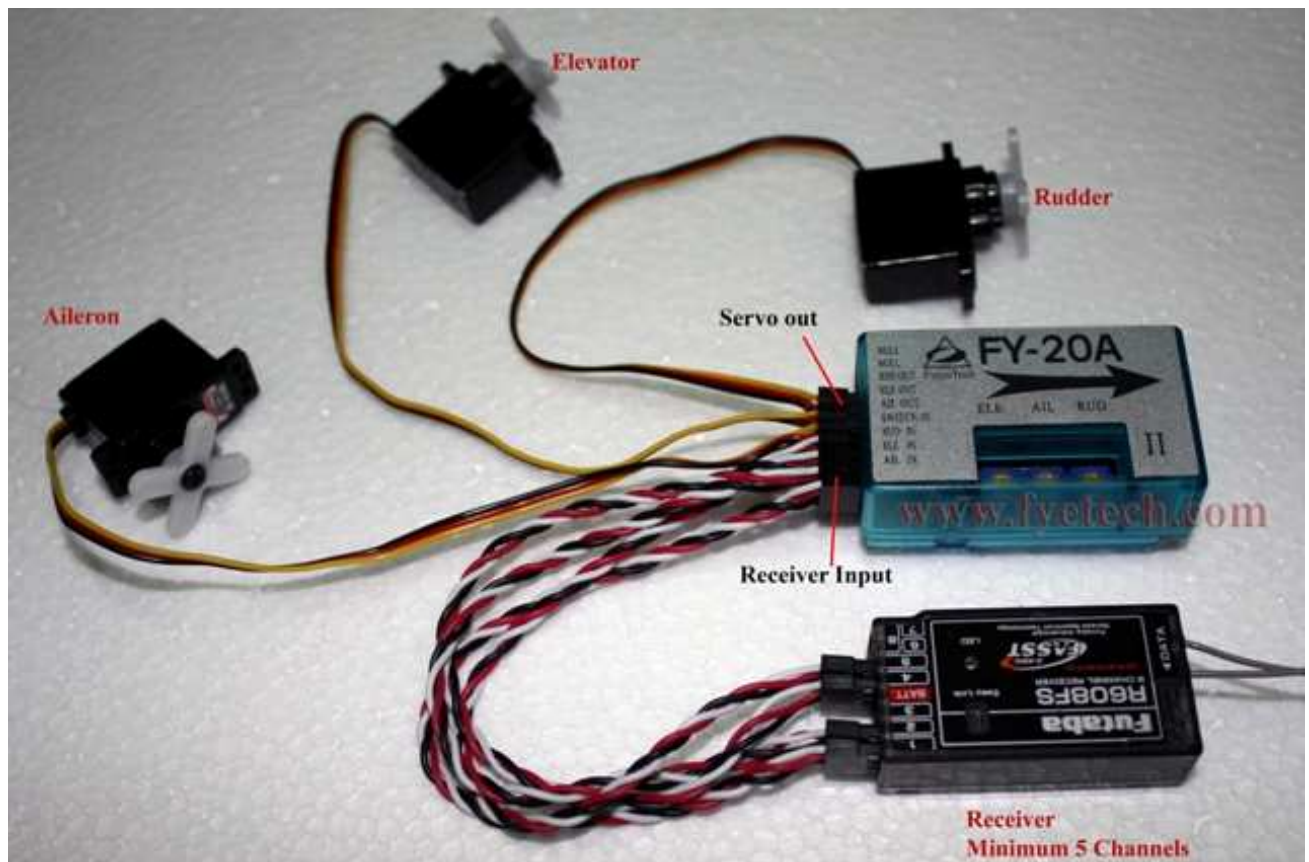

---

## Contents

OVERVIEW .....	4
System Working Principle .....	4
FY-20A Package: .....	5
Technical Specification and working requirements: .....	5
Remote Control system requirement: .....	5
FY-20A Flight Modes .....	6
□ Mode 1 : FY-20A Deactivated .....	6
□ Mode 2: 3D-Mode .....	6
□ Mode 3: Auto balance mode .....	6
FY-20A Connection Interface .....	8
Gyroscope initialization (re-setting): .....	9
Initialization / Reset Procedure.....	9
Electrical Connection and Diagram.....	9
Plane Connection Layout .....	11
Aileron-Elevator Mixing .....	11
DE-ACTIVATE MIXING IN YOUR RADIO .....	11
Rudder-Elevator Mixing.....	11
VIBRATION CONTROL .....	12
WARNING: VIBRATION CHECK.....	12
FY-20A INSTALLATION: ORIENTATION, POSITION & LEVEL .....	13
FY-20A Pre-Flight Checking and Debugging .....	14
PRE-FLIGHT CHECK.....	14
STEP 1: DIAL ADJUSTMENT .....	14
STEP 2: AUTO BALANCE MODE CHECK .....	14
STEP 3: AILERON CHECK.....	14
STEP 4: ELEVATOR CHECK.....	15
STEP 5: RUDDER CHECK.....	15
STEP 6: FLIGHT TEST AND SENSITIVITY ADJUSTMENT.....	16
WARNING: SAFETY PRECAUTION – MUST READ .....	16
Installation Start-Up Guide .....	17

---

## OVERVIEW

The FY-20A is a flight stabilizer for fixed wing aircraft based on inertial motion sensing. It utilizes a 3-axis gyroscope and 3-axis accelerometer to control the aircraft attitude in all 3 dimensions. The unit can be activated or de-activated via a spare channel from your receiver. Functions include:

- **Level flight** – when you need it, the FY-20A will automatically level the flight attitude of your aircraft. If you are just learning to fly, this will help you gain experience, log more flying time and increase your confidence. The FY-20A can be left activated throughout the flight duration, from take off until you landing.
- **Emergency Recovery** – in case you lose orientation or you feel the aircraft is out of control, activate the FY-20A via the switch and release of the control sticks. The FY-20A will automatically bring the plane back to level flight.
- **Precision Flying**: For experienced pilot, FY-20A can help you achieve more leveled and precise flight paths, especially when flying and landing in strong wind.
- **First Person View (FPV)**: For long distance flying or FPV, the FY-20A will take on the job of leveling the plane for you. Just point the plane where you want to go and enjoy the view!

## System Working Principle

The Flight Stabilization System (FSS) in the FY-20A is an integrated 3-axis gyroscope and 3-axis accelerometer. This forms a comprehensive inertial based navigation platform that calculates 3D flight attitude using proprietary FeiYu Tech algorithm.

When activated in *Balanced-Mode*, the FSS detects any changes to the model's horizontal attitude. If attitude change is detected, the unit will send out controlling signals to the plane's ailerons, elevator and rudder to counter that change.

By continuously doing this, the plane is kept in a state of equilibrium, resulting in a smooth level flight. The aircraft pitch attitude (nose up or down) is automatically controlled via the elevator, while aircraft roll is controlled through the ailerons. Flight direction to the left or right is automatically corrected via the rudder servo.

To achieve level flight, the pilot need only release the flight control sticks (aileron, elevator, rudder) so that they return to the transmitter *neutral* (middle) position. The model will immediately revert to level flight.

When used in the *3D-Mode*, if an aircraft is in an acrobatic flight, the activated FSS will automatically counter the rolling speed detected by the 3-axis gyros using all 3-axis controls (rudder, aileron and elevator). The plane will therefore maintain its last attitude state.

The FY-20A can be used in any environment both indoors and outdoors, and in any weather condition. After installation, it does not need any other initialization. Just switch on the power and your plane can take off in stable flight.

### **FY-20A Package:**

In each box of FY-20A, you will receive the following:

- 1 x FY-20A circuit board.
- 4 x Receiver connecting wires
- 2 x double-sided tape or Velcro fastener
- 1 x shock absorbing platform with 4 rubber bands already installed
- 1 x instruction manual for FY-20A



### **Technical Specification and working requirements:**

Input voltage	: 4.0 to 6.0 Volts
Current draw	: 52mA (5V)
Size	: 55 x 33 x 20 mm(2.17 x 1.3 x .79 in)
Weight (excluding wires)	: 20g(.71oz)
Temperature range	: -25°C~ +70°C(-13°F~+150°F)
Maximum rate of rotation	: $\leq 1200^{\circ} / s$

**Note:** For best results, please use a good BEC, with minimum 3A current output.

The FY-20A can be installed in the following aircrafts:

- Normal / Traditional fixed-wing planes
- Delta-winged plane with rudder
- Delta-winged plane without rudder,
- Plane without aileron,
- V –tail plane with aileron
- V –tail plane without aileron

### **Remote Control system requirement:**


The FY-20A has been tested to work with the following RC systems:

- Robbe-Futaba PPM / PCM 1024 / PCM G3 mode, 2.4 GHz systems ;
- Graupner/JR PPM 8, PPM 12, SPCM mode ;
- MPX PPM8, PPM 12 with UNI mode
- Any remote control system using the standard of 1.5 ms *neutral position*.

## FY-20A Flight Modes

- a) The FY-20A can be activated to fly in 3 flight modes. You may choose these flight modes via one free receiver channel and a 3-position switch from your computer radio:
- **Mode 1 : FY-20A Deactivated.** In this mode, all control of the aircraft is by the pilot. FY-20A does not participate in flight control.
  - **Mode 2: 3D-Mode.** In this mode, FY-20A will automatically recognize the latest position of the aircraft, and give controlling signal to keep the aircraft at the last attitude upon activation of 3D-Mode. All 3-axis will be stabilized, making your 3D acrobatic movement smoother. **However**, please note that this last attitude will be kept for less than 10 seconds. Continuous pilot input is still compulsory for safe aerobatic flying.
  - **Mode 3: Auto balance mode.** When in this mode and with your transmitter control sticks at center, the FY-20A will continuously send out controlling signal (aileron, elevator, rudder) to ensure the aircraft maintains its horizontal level flight attitude and stable direction. In this mode FY-20A will not allow acrobatic flights.
- b) To select the modes, set your End Points Adjustment (EPA) for the 3-Position Switch as follows:

Switch channel signal input	900-1200 $\mu$ S	1200-1800 $\mu$ S	1800-2100 $\mu$ S
Functional Mode	Auto balance mode	3D mode	Stabilization OFF

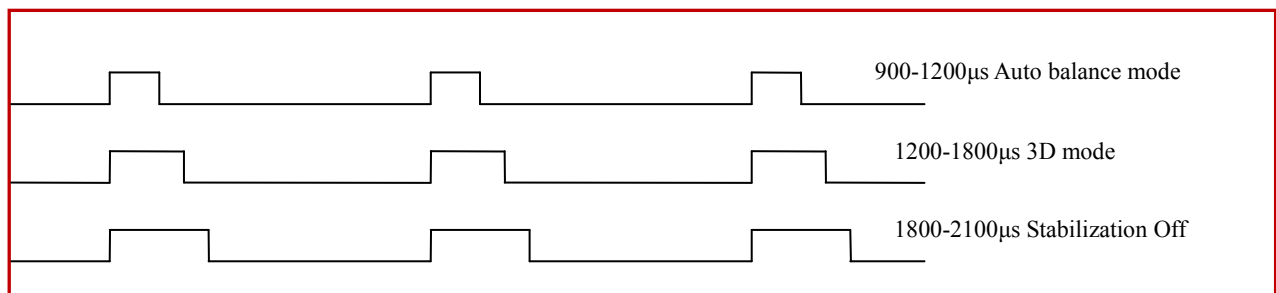


- c) You may also use a 2-position switch, at maximum and minimum End Points (EPA) to activate or deactivate flight stabilization (therefore omitting 3D-Mode).
- d) If the FY-20A does not detect any incoming signal to the Switch Channel Input, it will automatically engage Mode 3- **Auto Balance Mode**. We DO NOT recommend flying the unit with no signal input to the Switch Channel. It is possible that the auto balance will not function properly if the Switch channel is left open.
- e) We DO NOT recommend landing in 3D-Mode. In 3D-Mode the aircraft attitude is not tuned for smooth landing.
- f) The FY-20A operation does not control the Throttle channel. Your throttle channel should be

connected directly from your ESC to your Receiver.

- g) **Warning:** The Auto Balance Mode will provide a smoother leveled landing. However, note the turning radius is much larger when FSS is activated. Please ensure your landing area has adequate clearance for this larger radius.



FY-20A Connection Interface

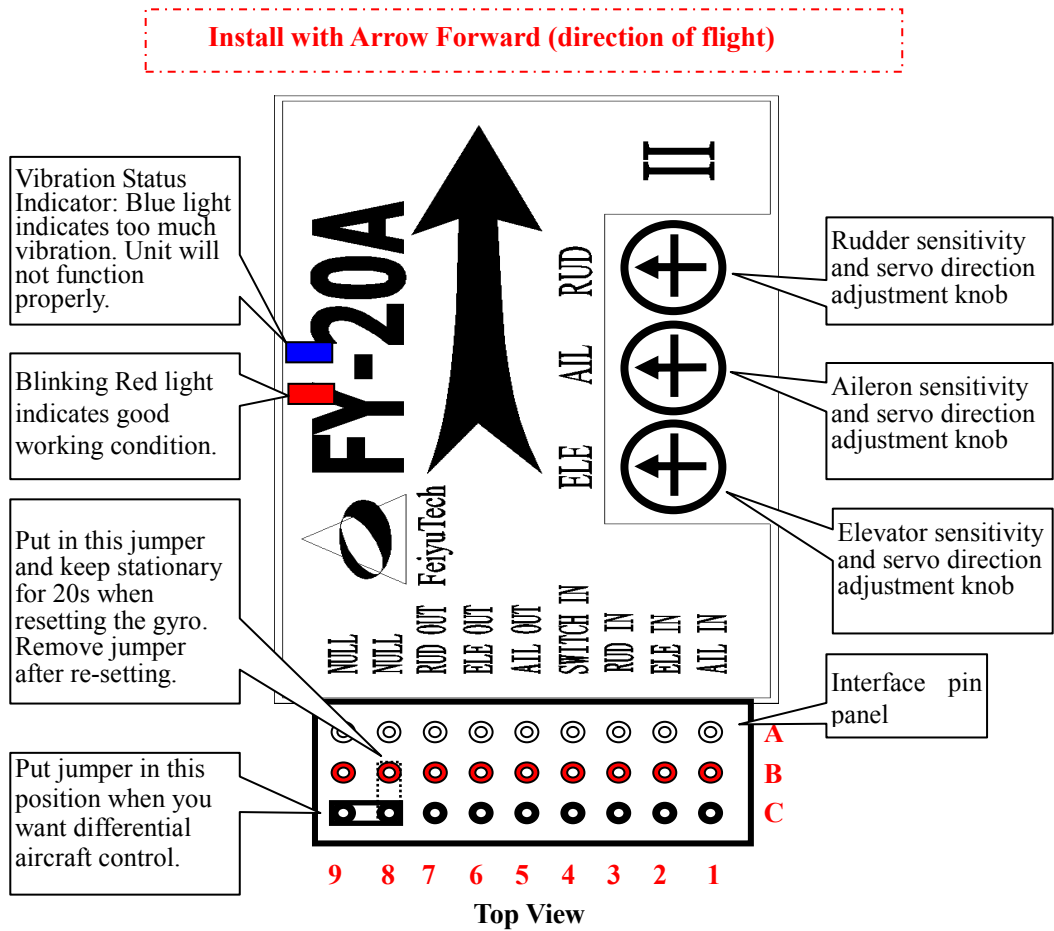

The list of the pin Interface:

9	8	7	6	5	4	3	2	1	
Not used	Not used	Signal Output to rudder	Signal Output to Elevator	Signal Output to Aileron	Signal Input for Mode Switch	Signal Input for rudder	Signal Input for elevator	Signal Input for aileron	<b>A</b>
Not used	Reset the gyro	Power to servo	Power to servo	Power to servo	Power to servo	Power to servo	Power to servo	Power to servo	<b>B</b>
Differential-mode	GND	GND	GND	GND	GND	GND	GND	GND	<b>C</b>




### Gyroscope initialization (re-setting):

Out of the box, the FY-20A has been fully initialized. However, if the following conditions occur, *resetting* and initialization is recommended:

1. The device has not been used for a long time.
2. There is a change in environmental temperature of over 30 degrees.
3. When in **Auto Balance Mode**, and the installed device in the horizontal position, the plane control surfaces begin to move and deflect by itself, without input from the pilot.

### Initialization / Reset Procedure

Install the jumper as shown in this picture:

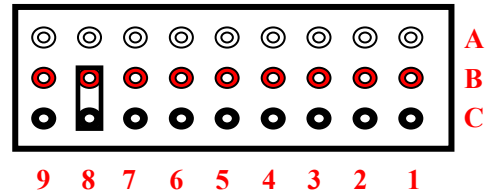

Power-ON the FY-20A and keep it stationary for at least 20 seconds. You will notice the red light blink with two different rates.

After 20 seconds the re-setting / initialization is complete.

Disconnect power, remove the jumper (keep it in a safe place for future use).

#### NOTE:


- Carry out this re-setting procedure only if the three conditions (above) occur. **Do not do regular re-setting.** It is NOT necessary and NOT recommended.
- The stabilizer unit does not need to be in a horizontal position during initialization. However, you must ensure there is no vibration during this process. If you suspect shaking had occurred, just restart the resetting process.

### Electrical Connection and Diagram

#### a) FY-20A Power

- The FY-20A operates between 4 to 6 volts input.
- FY-20A is powered via the Receiver connection.
- If your plane is electric powered, the Receiver power supply is normally from the ESC. Alternately, you can supply the Receiver and FY-20A via a separate battery elimination circuit (BEC).


#### b) Connection between the FY-20A and RC Receiver output is via the supplied wire:

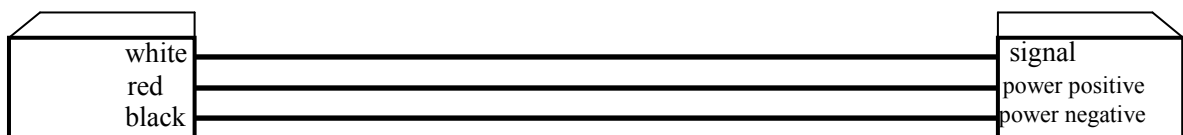

FY-20A requires a minimum of 5-channel RC receiver.


- 3 Receiver channels are used for aileron, elevator and rudder signal output. Connect this 3 receiver output signals to the FY-20A with the supplied wires.
- 1 Receiver channel is required to control the FY-20A working mode via a 3-position switch.

## e) Example Minimum 5 channel receiver:

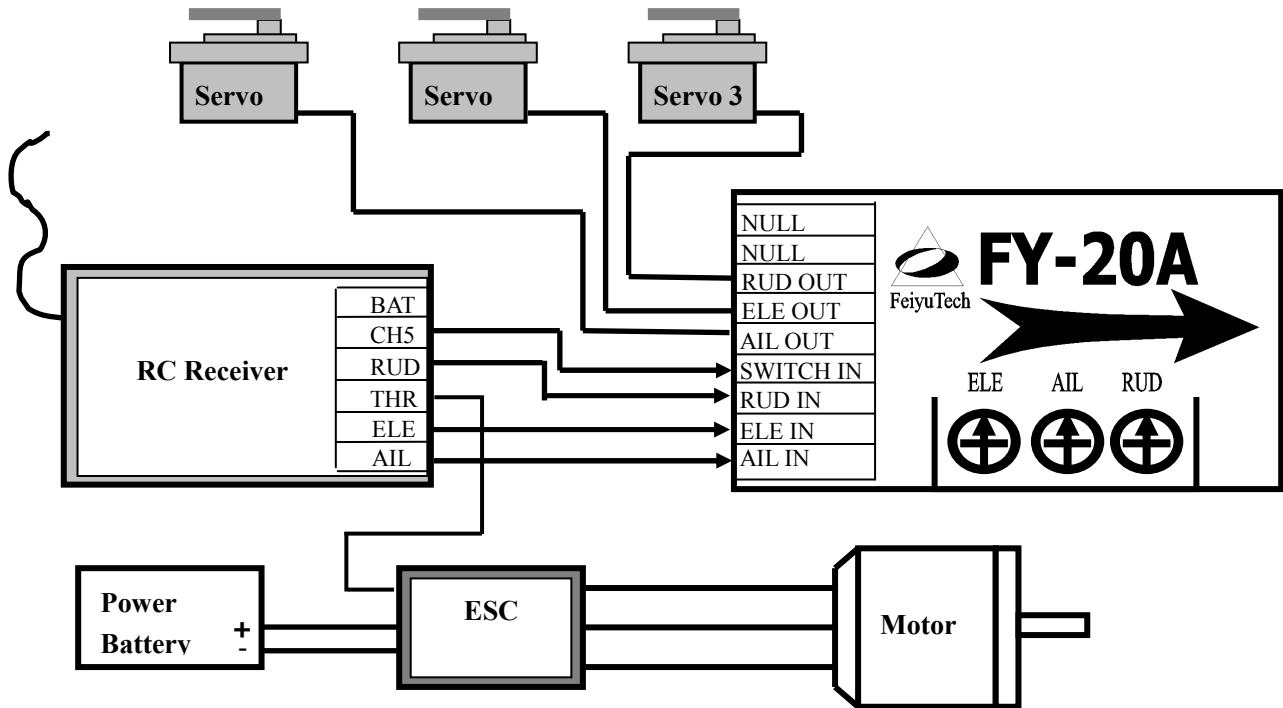**Channel 1** = Aileron Signal Output**Channel 2** = Elevator Signal Output**Channel 3** = Throttle Signal Output**Channel 4** = Rudder Signal Output,**Channel 5** = Switch channel with 3-position switch to control FY-20A working modes.**Connection Warning**

Be very careful when you are plugging in your servos / connectors. Wrong installation can result in damage to your power supply or your Receiver.

Double check your installation and ensure ALL connectors are plugged in correctly. Example of wrong installation:

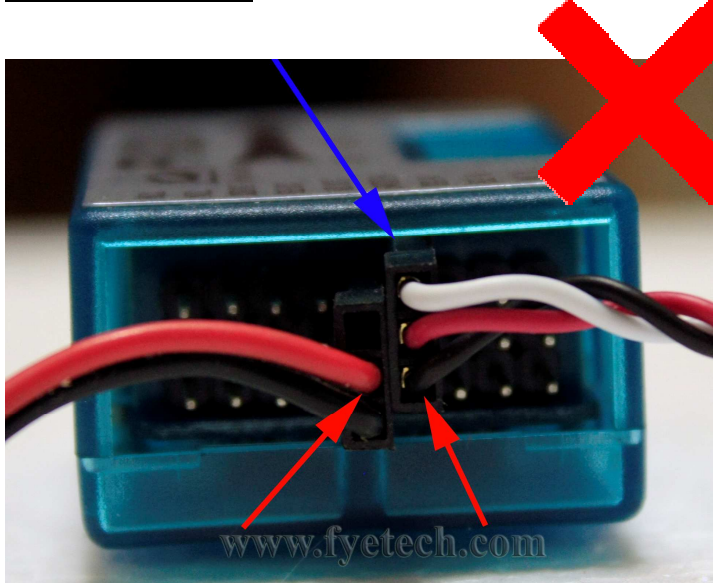

Servo (blue arrow) is plugged wrongly resulting in the signal wire (white) missing the FY20A signal pin. This results in the incoming power cable (RED) and servo wire (BLACK) short circuiting (red arrows). This will short circuit your battery or BEC!

**DOUBLE CHECK YOUR INSTALLATION BEFORE FIRST TIME POWERING UP!**

## Plane Connection Layout:

1) Normal / Traditional servo layout:

Servo 1	Servo 2	Servo 3
Aileron servo	Elevator servo	Rudder servo




2) Plane without aileron servo:

Servo 1	Servo 2	Servo 3
Rudder servo	Elevator servo	Don't connect

3) Delta-winged plane servo:

Servo 1	Servo 2	Servo 3
Differential servo 1	Differential servo 2	Rudder servo

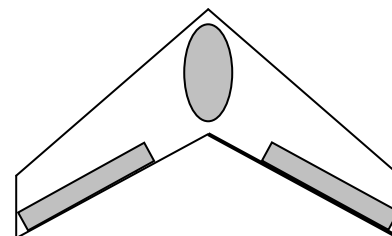

The Rudder channel is not involved in any of the mixing done inside the FY20A. Therefore, you can:

1. Keep the FY20A rudder channel (RUD IN, RUD OUT) open (not used).
2. Connect Receiver channel 4 to FY20A (RUD IN) & connect the rudder servo to RUD OUT (as per traditional fixed wing layout).

## Aileron-Elevator Mixing


### DE-ACTIVATE MIXING IN YOUR RADIO

**IMPORTANT:** If you have differential mixing already set in your radio, please deactivate it. The FY20A will take over the mixing function. Your radio setting should be the traditional plane settings.

For Delta Wing with Elevator signal mixing (e.g. Flying wing Elevon) - differential output is carried out by using the supplied jumper as shown on the right:-

The jumper has to be installed before powering ON. If you install it after powering ON, the mixing function will not take effect.


Do not remove this jumper. Leave it installed as long as you are using the mixing function.

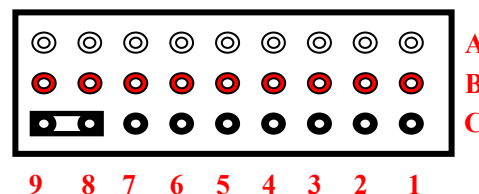

## Rudder-Elevator Mixing

The Jumper should NOT BE USED if you want to do Rudder-Elevator Mixing, because FY-20A does not support Differential-Mode stabilization for rudder-elevator mixing.



Therefore, the rudder-elevator differential control for V-tailed planes must have an add-on mixing device for the corresponding differential channel before connection to the servos:

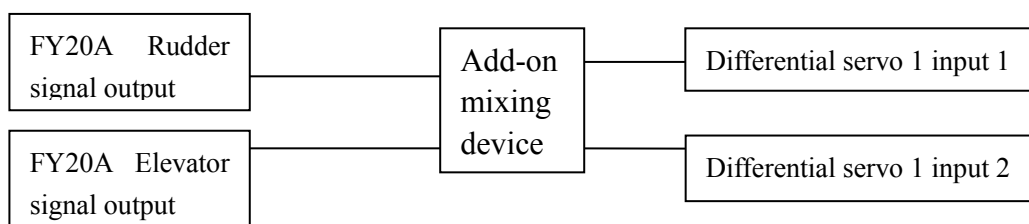



## FY-20A INSTALLATION: ORIENTATION, POSITION & LEVEL

- The FY-20A has an arrow printed on the top of it. Orient the arrow towards the front of the craft (i.e. direction of flight).
- When installing, please keep the FY-20A horizontal and as close as possible to the "Centre of gravity" (CG) of the aircraft.
- The control benchmark of the FY-20A is its horizontal position. Therefore, ensure the FY-20A is in the horizontal position when the plane is in level flight.
- If there is deviation between the FY-20A horizontal position and the plane's level flight, it may cause the neutral value to be different between the **Manual Mode** and the auto **Balance Mode**. This difference may result in the following:

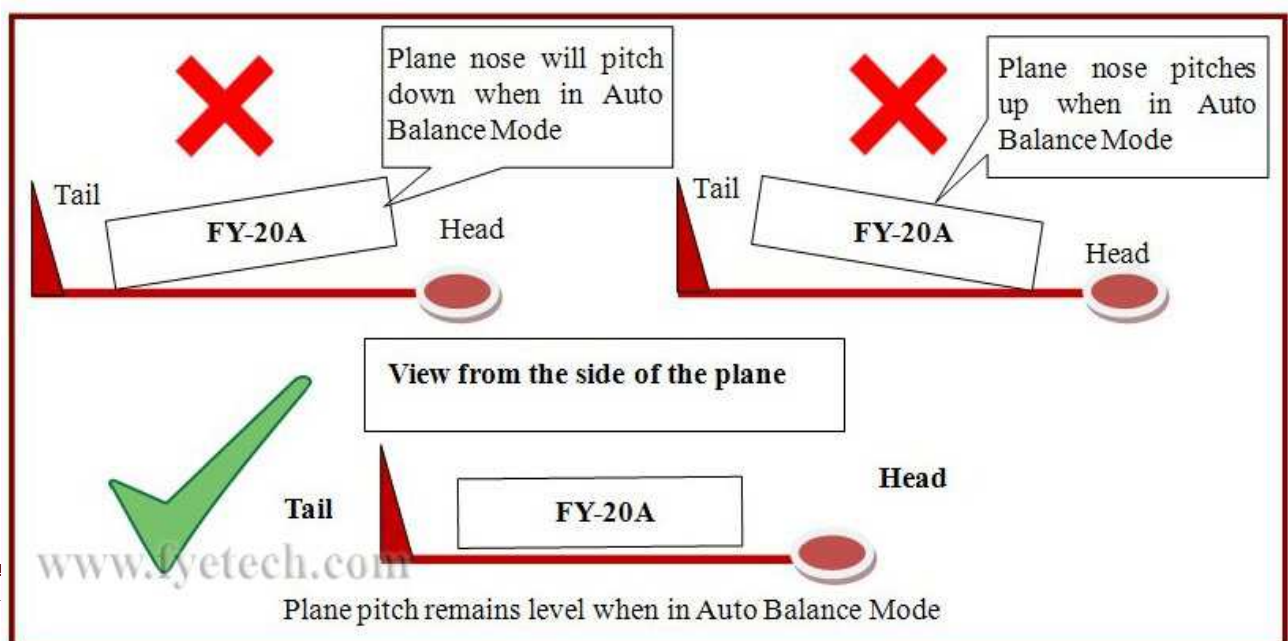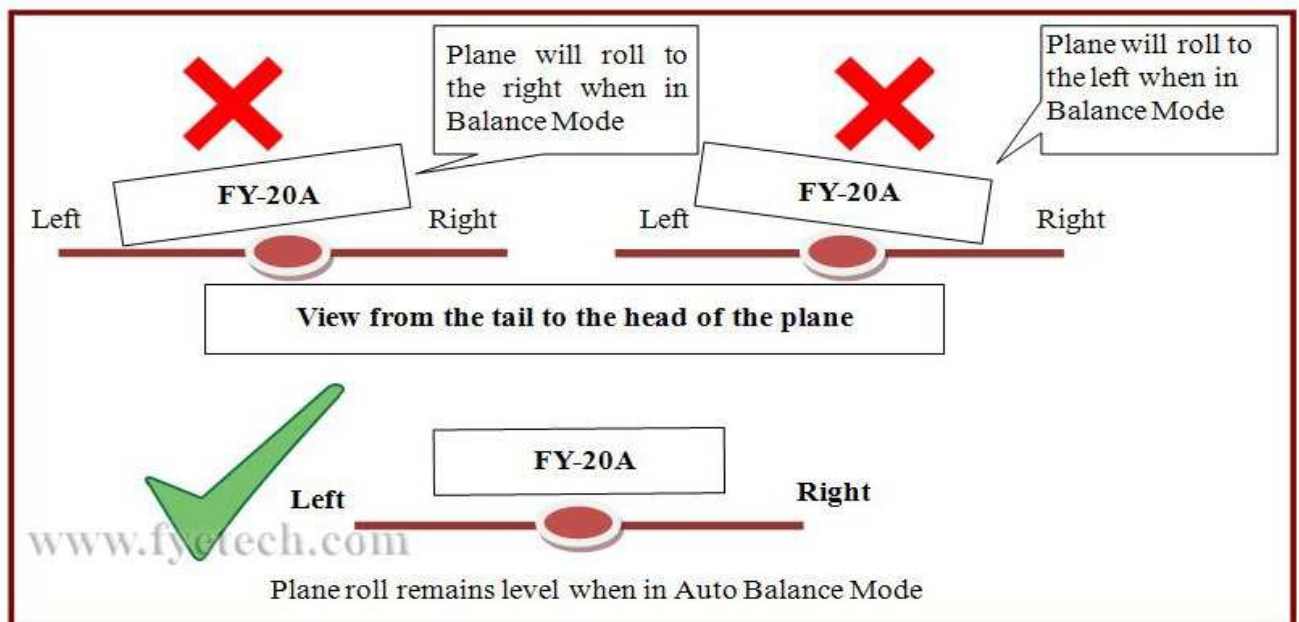




## FY-20A Pre-Flight Checking and Debugging

### PRE-FLIGHT CHECK:

The following procedure explains how to check for correct servo control direction upon FY-20A activation. You should also check that the FY-20A does not control the aircraft servos when in Mode 1 (Deactivated Mode).

### STEP 1: DIAL ADJUSTMENT

Adjust the three dials on the FY-20A so that the arrow is in the middle, as shown below. Then rotate all dials in one direction (does not matter which direction):

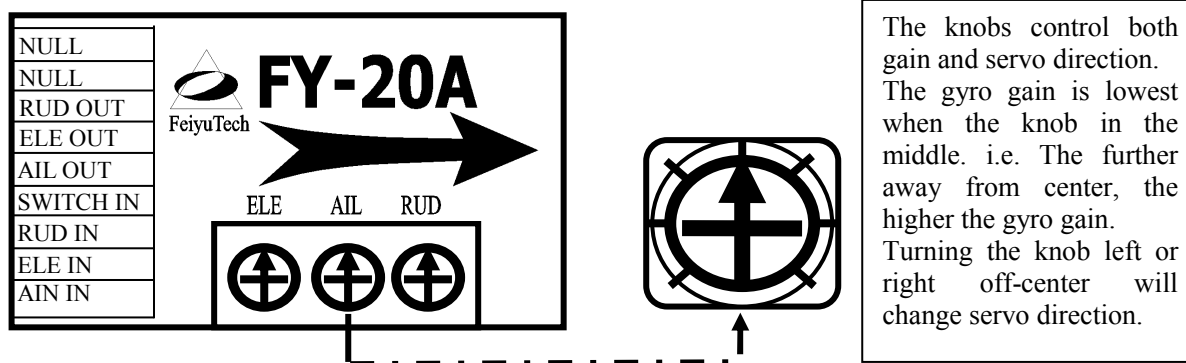


### STEP 2: AUTO BALANCE MODE CHECK

Place the plane on a horizontal surface with both the wings and pitch leveled. Centre the rudder surface. Move the 3-position switch so that the FY-20A is in the **Auto Balance Mode**.

### STEP 3: AILERON CHECK


- Incline the plane to the right (roll right). The ailerons should give a control signal to counter this roll direction (see below). Similar action should occur when rolled to the left. If the ailerons move correctly, the knob has been turned in the correct direction. You can now adjust gain by moving nearer (low gain) or further away (high gain) from center:

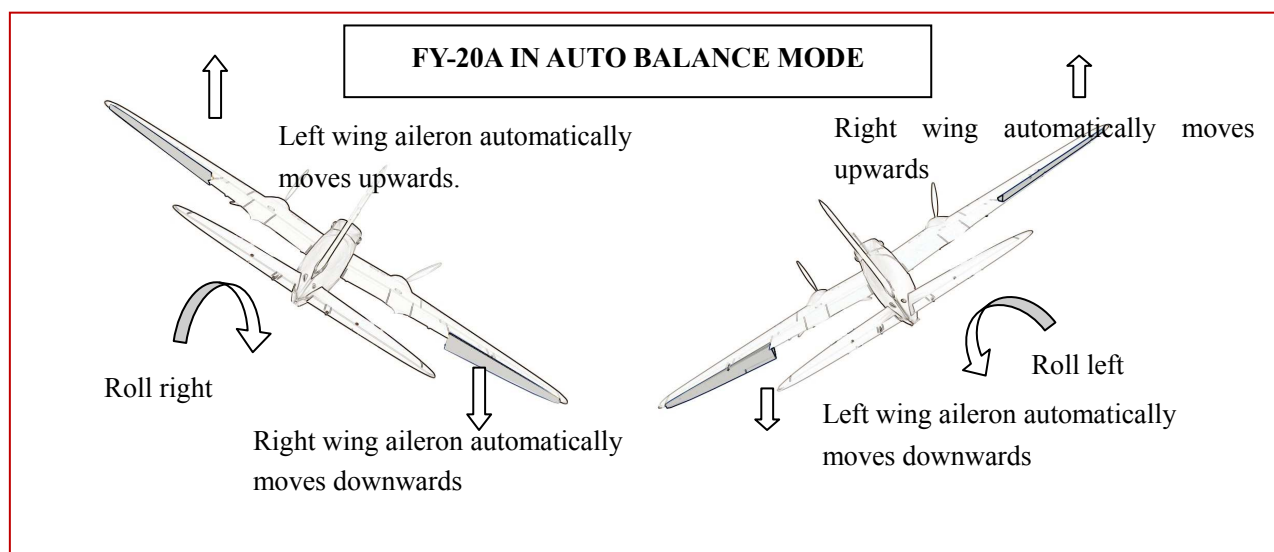

- If the ailerons do not follow the movements shown above, simply turn the aileron knob to the opposite side (beyond centre). You should now see the correct servo movement.

#### STEP 4: ELEVATOR CHECK


- Incline the plane NOSE UP. You should see the elevator move down. And when you move the NOSE DOWN, the elevator should move up. Move the Elevator knob to the opposite side (from Centre) if the servo movement is incorrect:

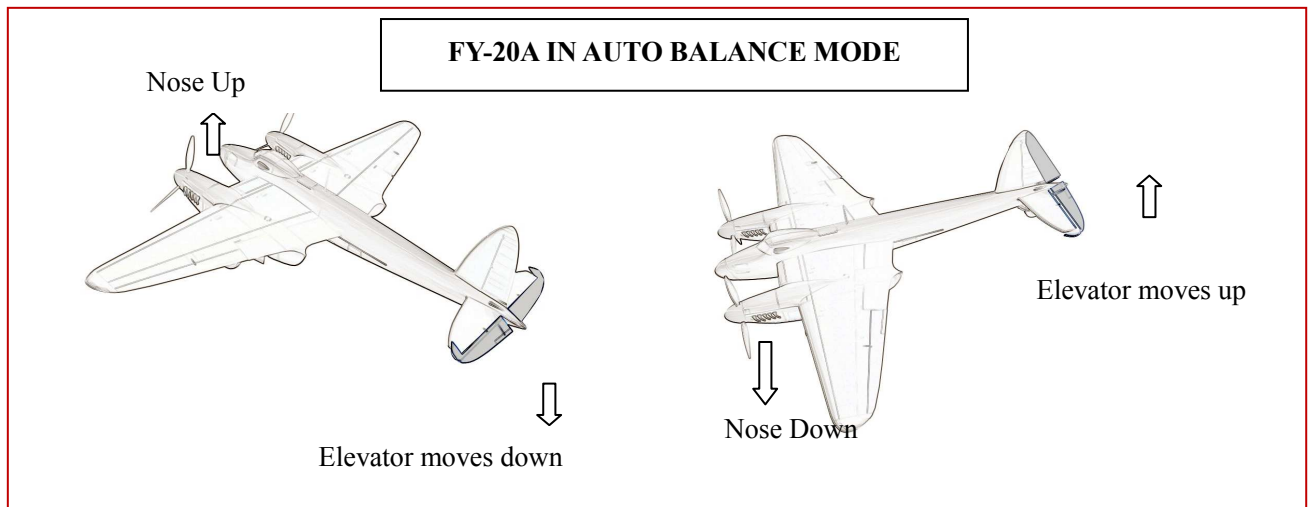

- Adjust Elevator gain according to your aircraft requirement (lowest gain nearest to centre, highest gain further away from centre).

#### STEP 5: RUDDER CHECK

- Rotate the plane at its centre axis from left to right. You should see the following action:

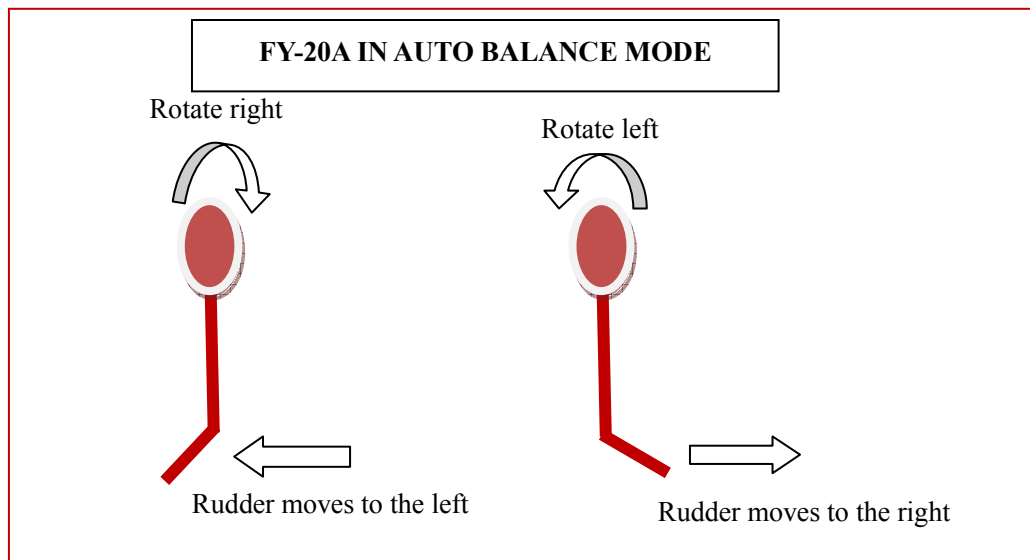

- Move the Rudder knob to the opposite side (from Centre) if the servo movement is incorrect:
- Adjust Rudder gain according to your aircraft requirement (lowest gain nearest to centre, highest gain further away from centre).



## STEP 6: FLIGHT TEST AND SENSITIVITY ADJUSTMENT

- Steps 1 to 5 should enable you to correctly set your servo movement direction via the 3 knob dials.
- To fine tune your aircraft attitude control via the FY-20A, some flight testing has to be performed.
- For the first flight it is recommended that the gains not be set too high. This will reduce large oscillation or ‘flight overcorrection’.
- After the flight take off, switch the device from Mode 1 (deactivated) to Mode 3 (Auto-balance mode).
- If you see oscillation of the wings, this indicates the Aileron gain is set too high. Switch back to manual mode and land the airplane. Reduce the sensitivity (move dial towards centre position) and fly again. You should see improvement in wing attitude. Adjust until you are satisfied with the level of wing stabilization.
- Too much Elevator gain will show the tail moving up and down (rocking). Too much Rudder gain will show tail wagging. Reduce gain until this flight overcorrection is gone.
- Alternately, if you find the flight correction is not enough, you can increase gain accordingly.

## WARNING: SAFETY PRECAUTION – MUST READ

- I. The purpose of the FY-20A (FSS) is to stabilize the aircraft. It is not an Anti-Stall device. The stabilization action of the FY-20A will fail if the aircraft is stalled.
- II. The aircraft direction is controlled by you, at all times. Make sure you know where you are going.
- III. The FY-20A is for your enjoyment. **Do not** fly the plane into a crowded area, where your aircraft can cause serious injury if it were to crash. Please be responsible when using this product.
- IV. Besides the regular pre-flight checks (we recommend a checklist), always check the correct operation of the stabilizer on the ground prior to take off.
- V. Any electronic hardware on an RC aircraft can fail over time. Please assess your aircraft and electronics condition before use. We are not responsible for any losses as a consequence of using this product.
- VI. Please ask an experienced RC Plane pilot for assistance if you are a beginner. It is absolutely critical that you get flight basics before proceeding. You also need directions to correctly assemble, take off and control your RC Model. We highly recommend joining your local RC Modeling club.
- VII. Never fly close to people, buildings, wires, vehicles, trees or closed spaces. You could seriously injure someone.

## Installation Start-Up Guide

### Description:

**Aircraft:** Electric 3D plane,

**Product:** FY-20A stabilizer and wirings;

**Radio:** FUTABA T8FG

**Receiver:** FUTABA R617FS

### A. Installation equipment:

1. Scissors
2. Sharp knife
3. Test battery
4. Velcro and double sided tape



### B. Wiring Installation

1. Insert Receiver CH1 to the AIL\_IN
2. CH2 to the ELE IN
3. CH4 to the RUD IN
4. CH5 to the SWITCH IN.



### C. Plane cockpit area:



---

#### **D. Shock absorbing platform with Velcro attached.**

Install this platform inside the plane, preferably at the centre of gravity (CG).

#### **E. Connect the FY-20A to Receiver**

- a. ESC signal input to CH3 receiver
- b. Aileron servo to AIL OUT of FY-20A
- c. Elevator servo to ELE OUT of FY-20A
- d. Rudder servo to RUD OUT of FY-20A



#### **F. FY-20A Installation**

Use double-sided taped Velcro to stick the FY-20A inside the plane. We highly recommend using the included vibration damping platform. Install the F-20A Horizontally. Ensure that you install the unit with the Arrow pointing towards the aircraft nose (direction of flight). Also ensure that the receiver is fixed firmly.



- #### **G. Set CH5 to to any 3-position switch on your transmitter (to select 3 modes control) or 2-position switch (to activate or deactivate FSS only).**





**H. Turn on your transmitter and connect power to your plane(Be sure to remove the propeller!).**

- a. Adjust the three dial knobs. Turn all in one direction.
- b. Switch the FY-20A to Mode 3 (Auto Balance Mode) via the SE switch.
- c. Check for the correct movement direction of each servo
- d. Reverse dial knob rotation if servo counter movement is not moving correctly.




- e. **Aileron:** If plane is rolled to the right, the FY-20A stabilizer automatically counters to roll the plane to the left and vise-versa. If the control direction is wrong, rotate the AIL dial knob in the opposite direction.



- f. **Elevator:** if the plane nose is pitched up, the FY-20A stabilizer automatically moves elevator down. If the plane is pitched down ,the FY-20A stabilizer automatically moves the elevator up. If the control direction is wrong, rotate the ELE dial knob in the opposite direction.



- g. **Rudder:** If the plane's nose is rotated to the right rapidly, the FY-20A stabilizer automatically moves the rudder to the left. If the plane's nose is rotated to the left, the rudder will automatically move to the right. If the control direction is wrong, rotate the RUD dial knob in the opposite direction.

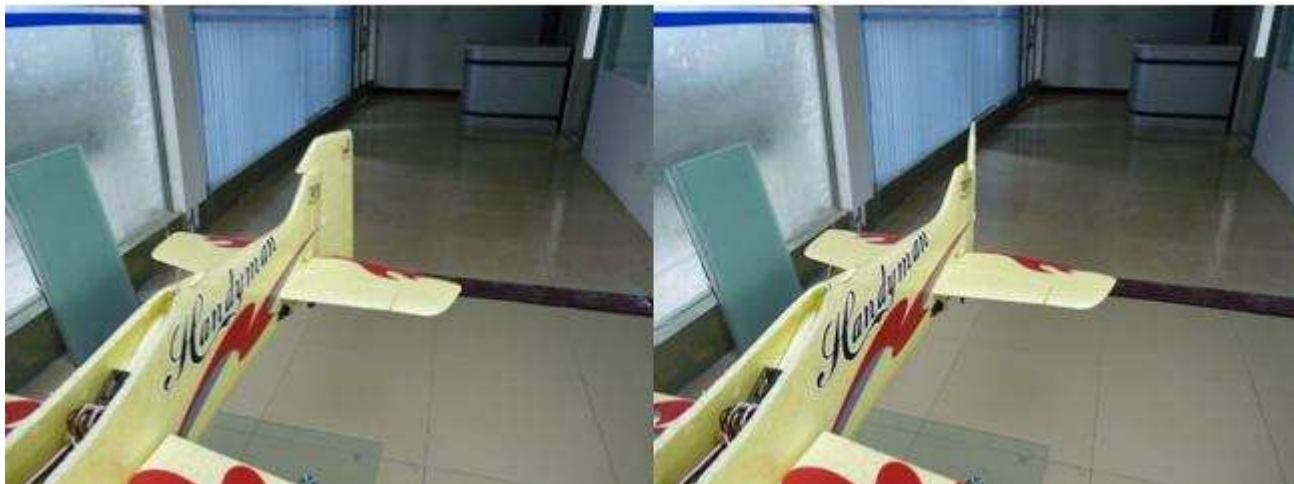

- h. Check that the FY-20A is installed firmly on the vibration-absorbing mount. Close the cockpit. Installation is completed. Test fly to adjust gain.



**Note:** *Fyotech* reserves the right to change this manual at any time.