



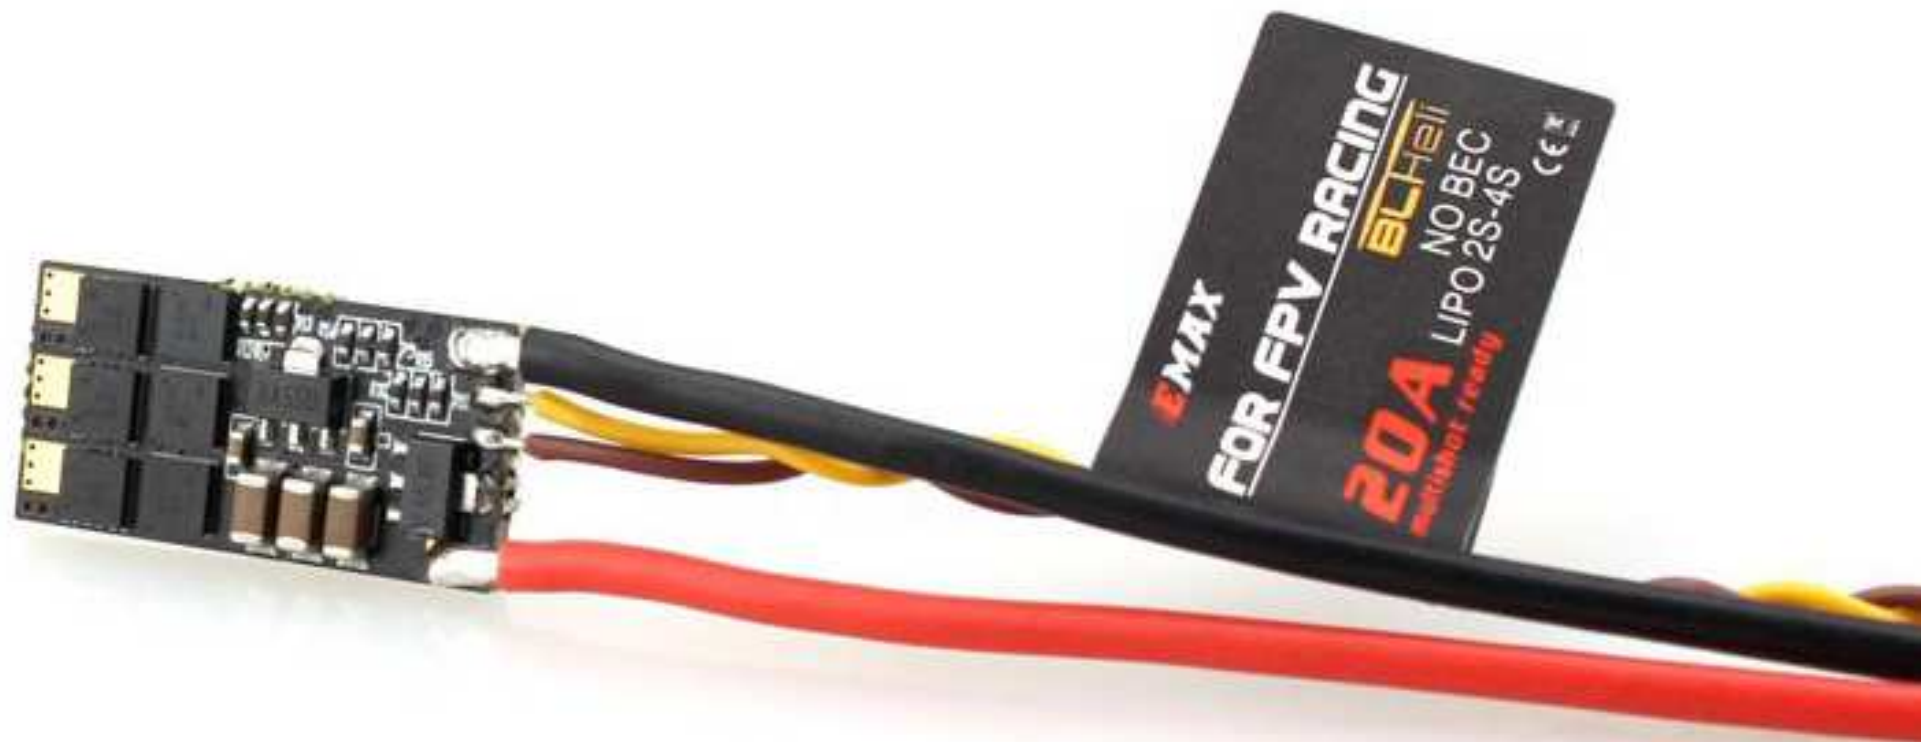

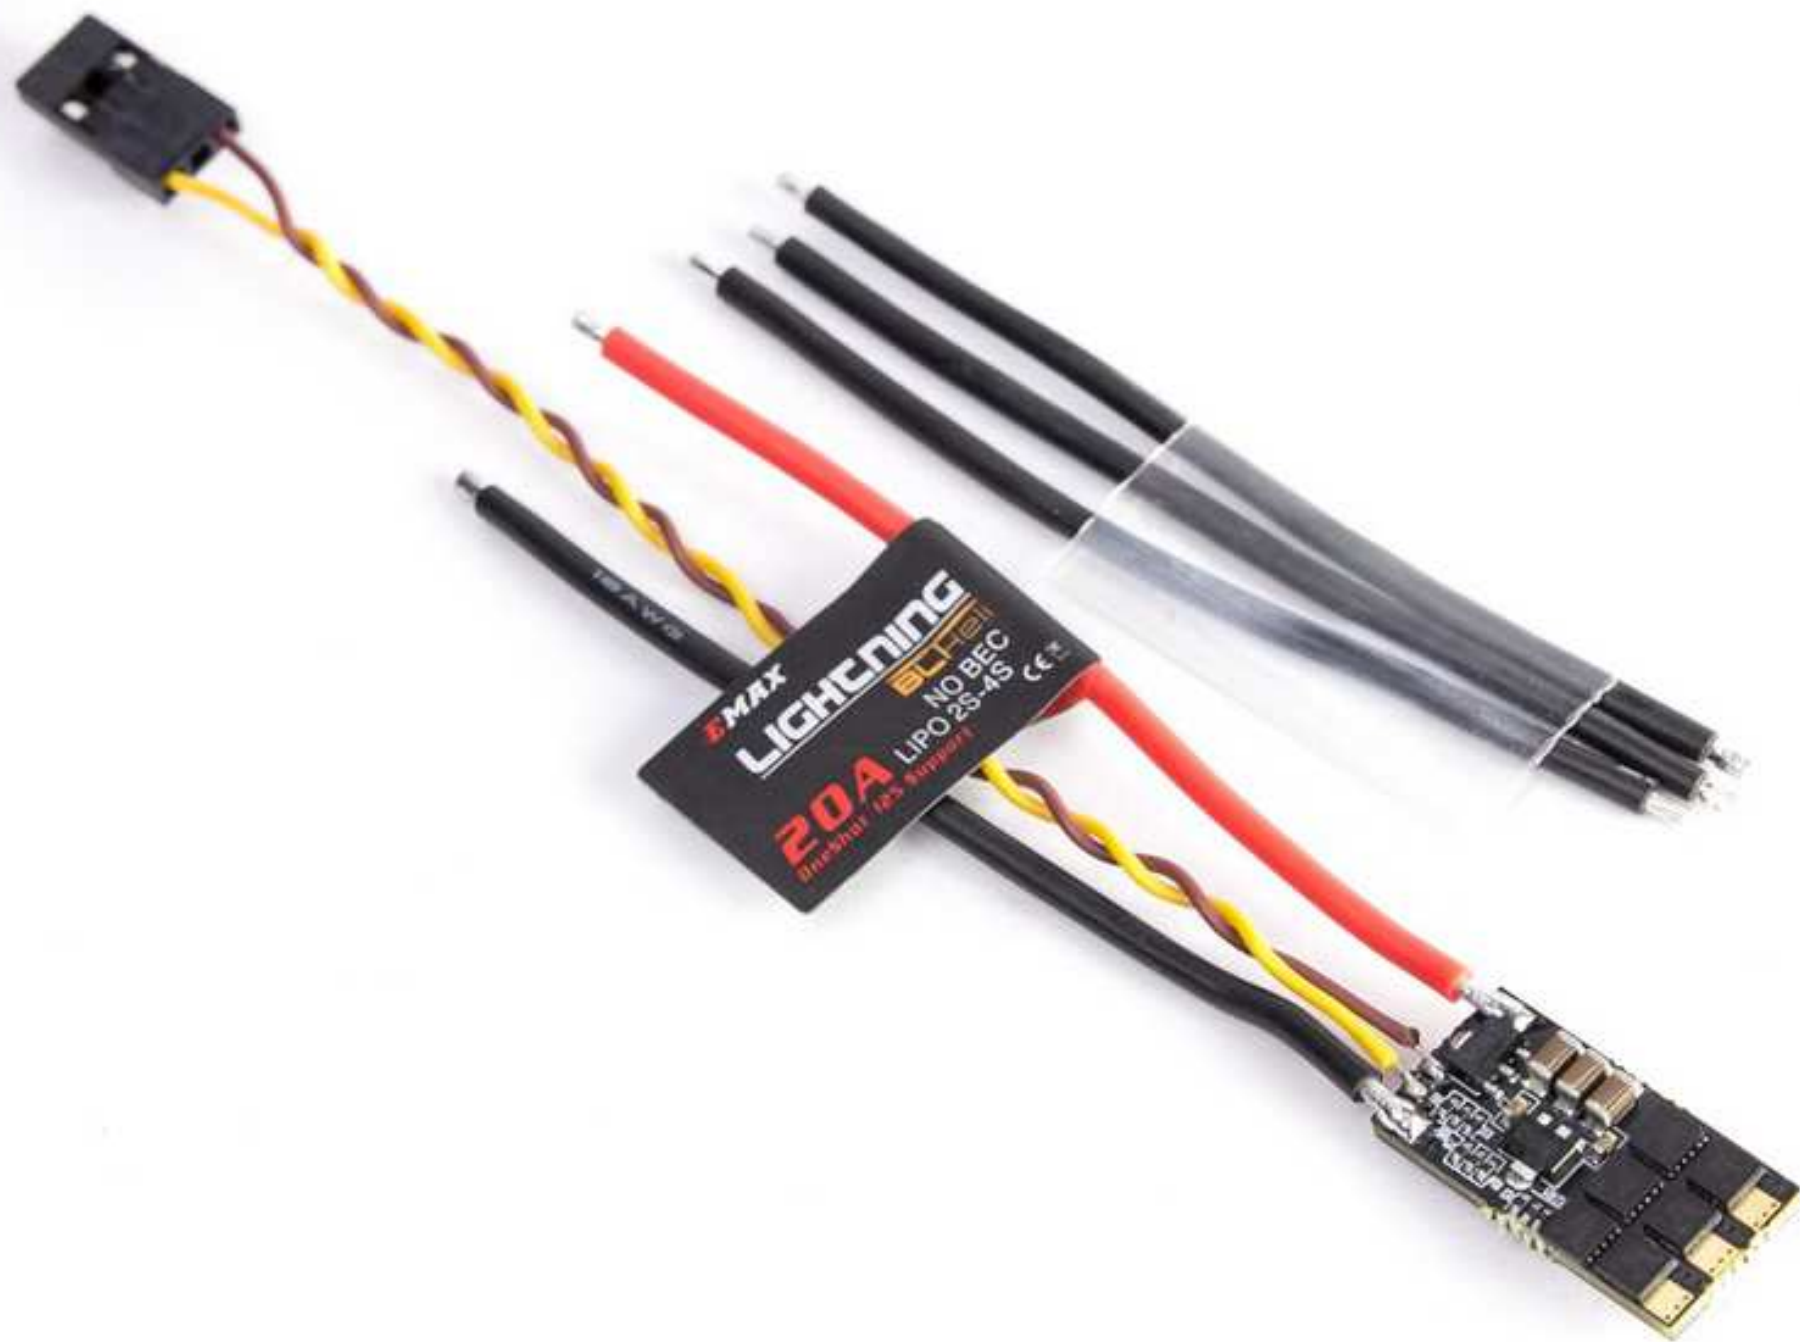

EMAX

LIGHTNING SERIES

BLHeli

INSTANT POWER-SMOOTH CONTROL
Lightning20A/30A


Feature:



1


The first BLHeli ESC
with Synchronous
Rectification hardware
design in the market

2

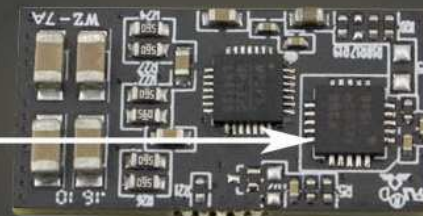

Utilizes high performance MCU F396

3 Weight: 4.78g (w/wires)
Dimension: L:24.5 x W:12.5 x H:5mm

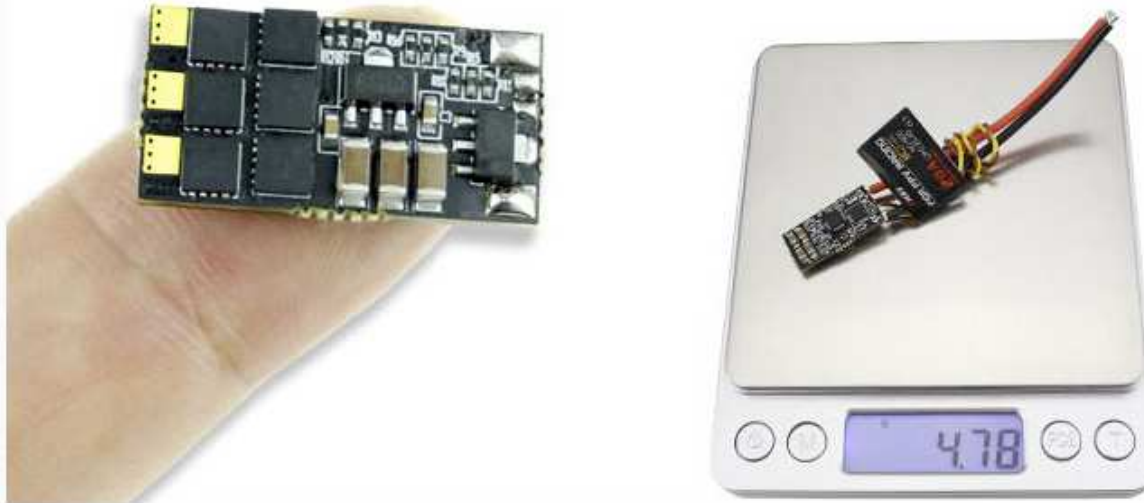

4 FW upgraded via signal wire



5 Active Breaking/Oneshot125/
Multishot ready

6 Anti-counterfeit code of authenticity



型号 Item	持续工作电流 Continuous Current	瞬时电流 Burst Current	适用锂电节数 Lipo(cell)	长x宽x厚 (mm) Dimension L x W x H (mm)	重量(含线) Weight Wires Included	BEC(线性) BEC	MCU
Lightning-20A	20A	30A	2S-4S	24.5x12.5x5	4.78g	NO	F396
Lightning-30A	30A	40A	2S-4S	24.5x12.5x5	4.78g	NO	F396