







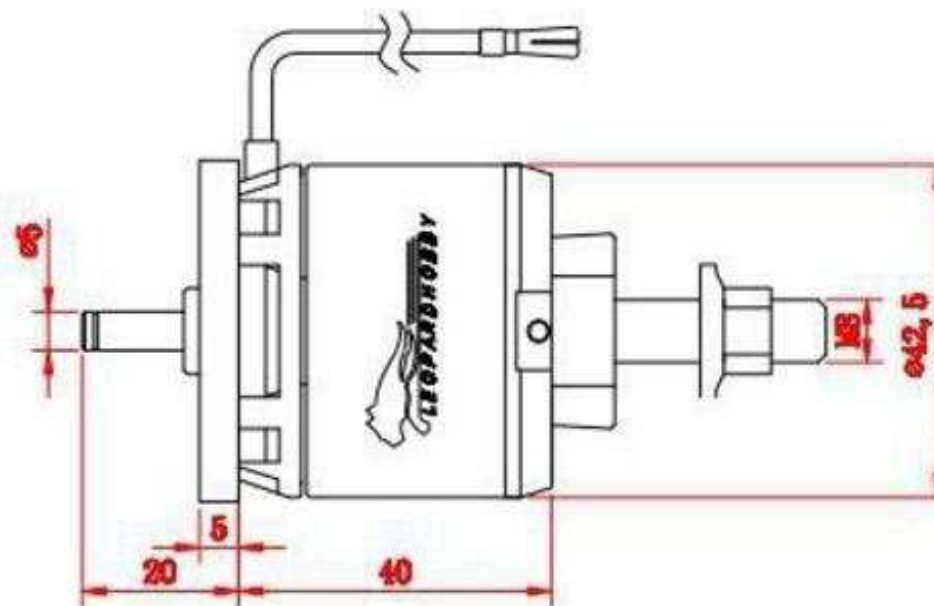

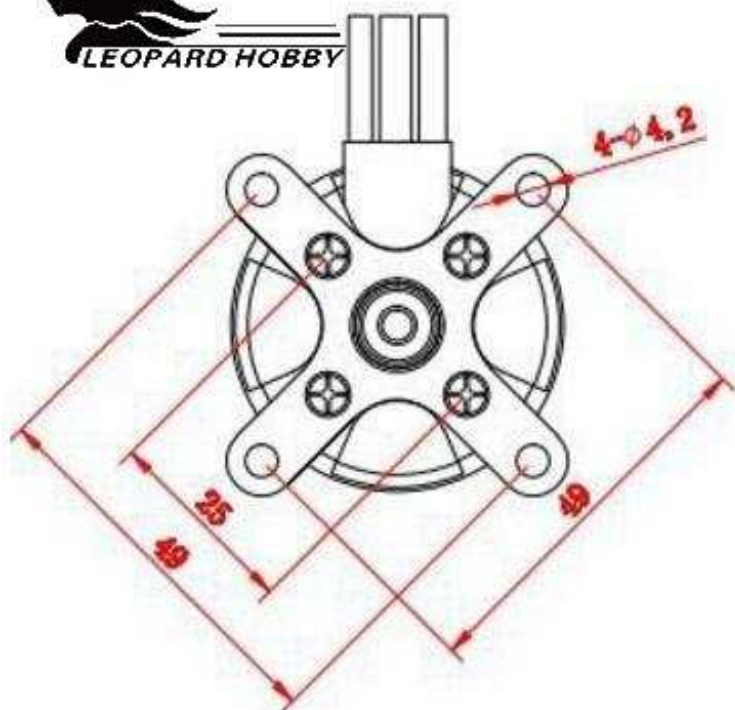

LC4250 Series Specification (Dia.×Length: Φ42.0mm×50.0mm)

Length of extend shaft : ---				20(mm)							
Shaft Dia. : -----				5(mm)							
Weight: -----				195(g)							
Model	KV	No-load current (A)	Max Amps (A)	Propeller	Working Voltage (V)	Working Current (A)	Pull(g)	Power(w)	Resistance	Load current (A)	Suggested airplane weight (g)
LC4250-5.5T	800	2.2/10V	65	1050	14.8	20	1500	296	0.0218	55.5	3300
					16.8	25	1800	420			
					18.5	30	2250	555			
					21	37.5	2800	787.5			
					22.2	40	2950	888			
					25.2	45	3300	1134			
				1155	11.1	16.5	1150	183.15			
					12.6	21	1400	264.6			
					14.8	28	1900	414.4			
					16.8	34	2350	571.2			
					18.5	38.5	2580	712.25			
					21	44	3000	924			

					22.2	23.5	2600	521.7			
					25.2	29	3100	730.8			
				1340	14.8	10.5	1150	155.4			
					16.8	13	1450	218.4			
					18.5	15	1750	277.5			
					21	18.5	2250	388.5			
					22.2	20	2500	444			
					25.2	25.5	3100	642.6			
LC4250-5T	850	2.4/10V	68	1050	14.8	20	1500	296	0.0172	57	3300
					16.8	25	1800	420			
					18.5	30	2250	555			
					21	37.5	2800	787.5			
					22.2	40	2950	888			
					25.2	45	3300	1134			
				1155	11.1	16.5	1150	183.15			
					12.6	21	1400	264.6			
					14.8	28	1900	414.4			
					16.8	34	2350	571.2			
					18.5	38.5	2580	712.25			
					21	44	3000	924			
LC4250-9T	480	1.1/10V	35	1155	14.8	9.5	800	140.6	0.0493	30	2800
					16.8	12	1200	201.6			
					18.5	14	1400	259			
					21	18	1950	378			
					22.2	20	2000	444			
					25.2	26	2600	655.2			
				1580	14.8	28	2600	414.4			
					16.8	35	3100	588			
					18.5	38	3800	703			
				1260	14.8	12	1200	177.6			
					16.8	14.5	1500	243.6			
					18.5	17	1900	314.5			
					21	21	2300	441			
					22.2	23.5	2600	521.7			
					25.2	28	3100	705.6			

LC4250-12T	360	0.8/10V	28	1 3 4 0	14.8	10.5	1150	155.4	0.0868	24	2600
					16.8	13	1450	218.4			
					18.5	15	1750	277.5			
					21	18.5	2250	388.5			
					22.2	20	2500	444			
					25.2	25.5	3100	642.6			
				1 5 8 0	14.8	15	1900	222			
					16.8	18	2250	302.4			
					18.5	21	2600	388.5			
					21	26	3300	546			
					22.2	29	3550	643.8			
					25.2	34.5	4200	869.4			
				1 6 1 0	14.8	22	2100	325.6			
					16.8	26.5	2400	445.2			
					18.5	32	2800	592			