
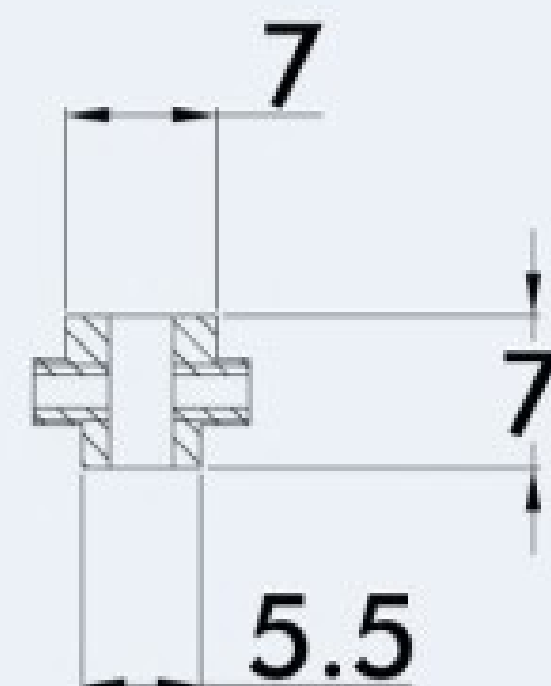
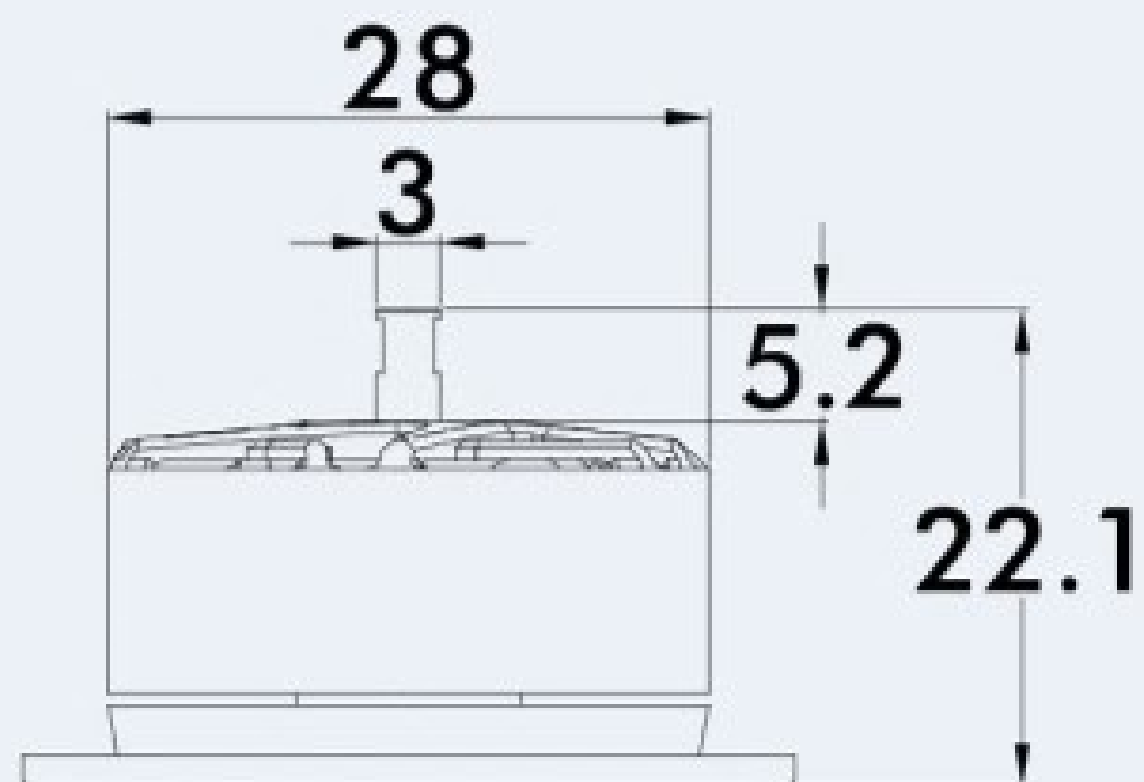


Type	Propeller	Throttle	Voltage (V)	Current (A)	Power (W)	RPM	Torque (N*m)	Thrust (g)	Efficiency (g/W)	Operating Temperature (°C)
AM60 V2 KV 1550	T8044	30%	8.21	0.67	5.52	3289	0.01	58	10.48	ordinary temperatures
		35%	8.21	0.87	7.16	3695	0.01	74	10.39	
		40%	8.21	1.11	9.07	4092	0.01	93	10.25	
		45%	8.20	1.41	11.58	4528	0.01	116	9.99	
		50%	8.19	1.86	15.25	5052	0.02	146	9.58	
		55%	8.19	2.38	19.52	5550	0.02	179	9.19	
		60%	8.18	3.03	24.77	6056	0.03	217	8.77	
		65%	8.16	3.74	30.53	6519	0.03	256	8.40	
		70%	8.16	4.54	37.02	6978	0.04	296	8.01	
		75%	8.14	5.42	44.11	7392	0.04	339	7.68	
		80%	8.13	6.35	51.63	7802	0.05	379	7.34	
		85%	8.11	7.44	60.36	8215	0.05	425	7.04	
		90%	8.10	8.59	69.59	8600	0.06	470	6.76	
		95%	8.08	9.83	79.38	8978	0.06	515	6.49	
		100%	8.06	11.30	91.04	9363	0.07	566	6.21	

Note: Motor temperature is motor surface temperature @100% throttle running 3mins.

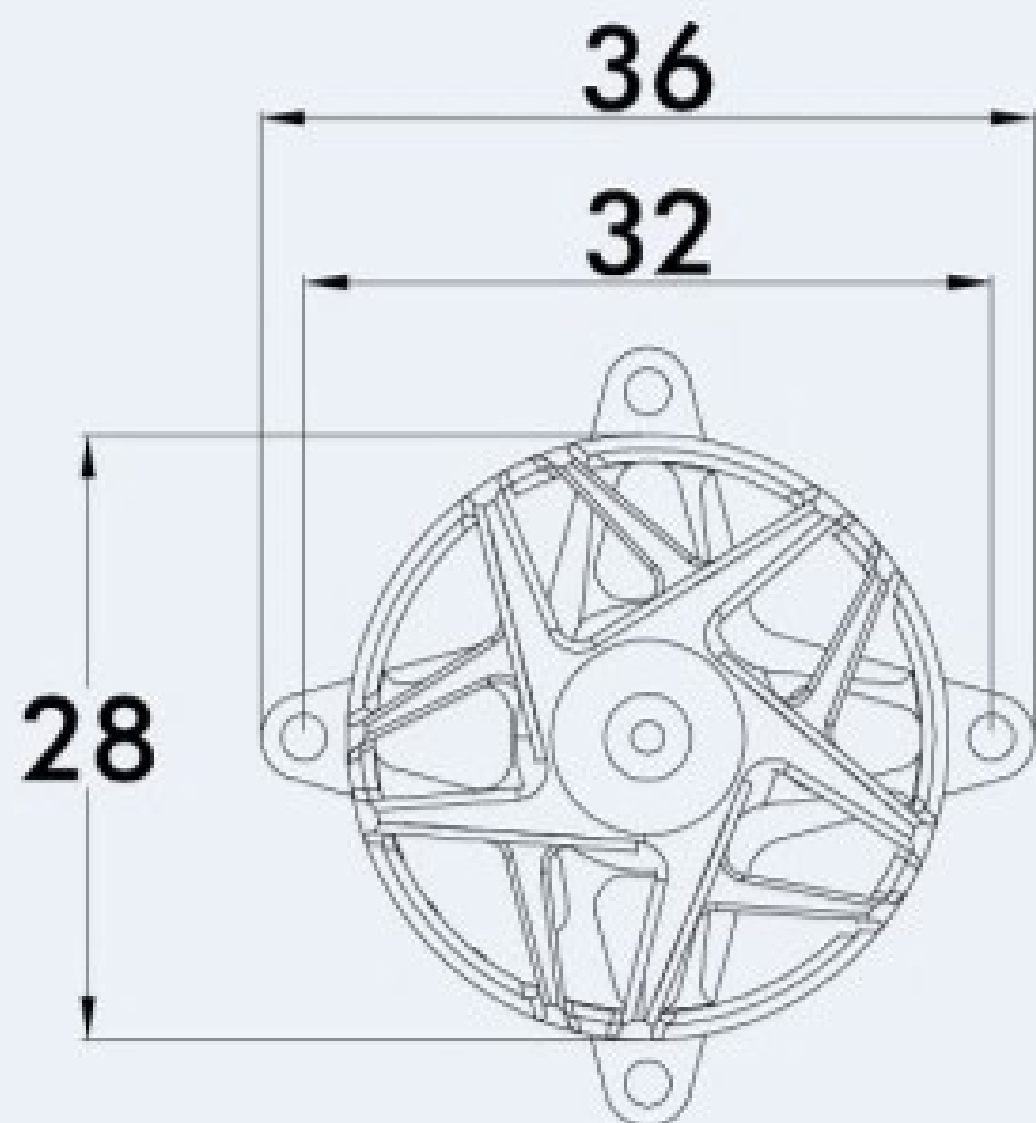

Type	Propeller	Throttle	Voltage (V)	Current (A)	Power (W)	RPM	Torque (N*m)	Thrust (g)	Efficiency (g/W)	Operating Temperature (°C)
AM60 V2 KV 1550	T9048	30%	12.59	1.32	16.67	4260	0.02	160	9.59	ordinary temperatures
		35%	12.59	2.03	25.59	5007	0.03	225	8.78	
		40%	12.57	2.92	36.68	5693	0.04	297	8.09	
		45%	12.56	4.01	50.34	6351	0.05	375	7.44	
		50%	12.54	5.24	65.72	6937	0.06	455	6.92	
		55%	12.52	6.63	82.95	7489	0.07	534	6.44	
		60%	12.50	8.25	103.12	8020	0.08	620	6.01	
		65%	12.47	9.94	124.03	8487	0.09	704	5.67	
		70%	12.45	11.81	147.00	8946	0.11	790	5.37	
		75%	12.42	13.96	173.30	9387	0.12	882	5.09	
		80%	12.39	16.03	198.58	9771	0.13	960	4.84	
		85%	12.35	18.35	226.57	10146	0.14	1040	4.59	
		90%	12.30	20.97	257.80	10516	0.15	1129	4.38	
		95%	12.25	23.56	288.68	10847	0.16	1204	4.17	
		100%	12.21	26.23	320.40	11143	0.17	1275	3.98	

Note: Motor temperature is motor surface temperature @100% throttle running 3mins.

Type	Propeller	Throttle	Voltage (V)	Current (A)	Power (W)	RPM	Torque (N*m)	Thrust (g)	Efficiency (g/W)	Operating Temperature (°C)
AM60 V2 KV 1550	T9048	30%	8.22	0.72	5.93	2847	0.01	69	11.55	ordinary temperatures
		35%	8.22	1.00	8.18	3289	0.01	93	11.33	
		40%	8.21	1.42	11.67	3794	0.02	127	10.91	
		45%	8.20	1.93	15.86	4284	0.02	163	10.28	
		50%	8.19	2.58	21.10	4771	0.03	205	9.70	
		55%	8.18	3.35	27.41	5235	0.03	250	9.11	
		60%	8.17	4.27	34.83	5695	0.04	300	8.62	
		65%	8.16	5.22	42.53	6102	0.05	346	8.15	
		70%	8.14	6.27	50.99	6492	0.05	394	7.74	
		75%	8.12	7.44	60.44	6868	0.06	444	7.35	
		80%	8.10	8.74	70.85	7221	0.07	497	7.01	
		85%	8.08	10.07	81.41	7545	0.07	547	6.72	
		90%	8.06	11.64	93.87	7888	0.08	601	6.41	
		95%	8.04	13.27	106.66	8194	0.09	654	6.13	
		100%	8.02	15.00	120.25	8495	0.10	707	5.88	

Note: Motor temperature is motor surface temperature @100% throttle running 3mins.

Type	Propeller	Throttle	Voltage (V)	Current (A)	Power (W)	RPM	Torque (N*m)	Thrust (g)	Efficiency (g/W)	Operating Temperature (°C)
AM60 V2 KV 1550	T8044	30%	12.62	1.08	7.69	4673	0.02	125	9.16	ordinary temperatures
		35%	12.61	1.51	11.65	5323	0.02	166	8.76	
		40%	12.60	2.14	17.57	6081	0.03	222	8.21	
		45%	12.59	2.92	24.98	6788	0.04	283	7.69	
		50%	12.57	3.85	33.78	7458	0.04	350	7.24	
		55%	12.56	4.92	43.84	8100	0.05	419	6.78	
		60%	12.54	6.14	55.49	8708	0.06	492	6.39	
		65%	12.52	7.59	68.76	9310	0.07	570	6.00	
		70%	12.50	9.05	82.12	9862	0.08	645	5.70	
		75%	12.48	10.62	96.21	10380	0.09	718	5.42	
		80%	12.45	12.56	112.94	10900	0.10	803	5.14	
		85%	12.42	14.59	130.47	11383	0.11	889	4.91	
		90%	12.40	16.50	146.57	11790	0.12	964	4.71	
		95%	12.36	18.63	163.59	12218	0.13	1036	4.50	
		100%	12.31	21.05	181.60	12616	0.14	1116	4.31	

Note: Motor temperature is motor surface temperature @100% throttle running 3mins.