




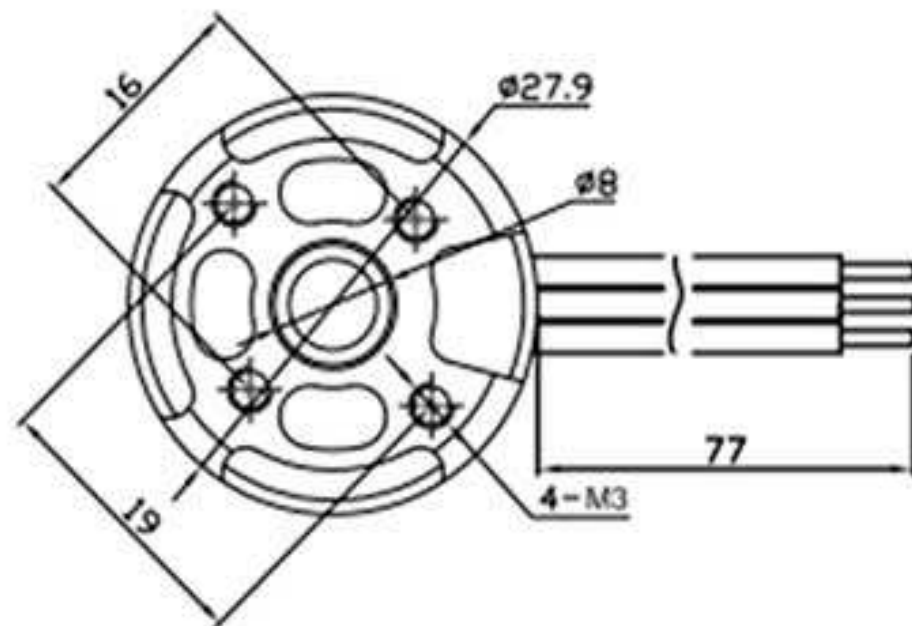

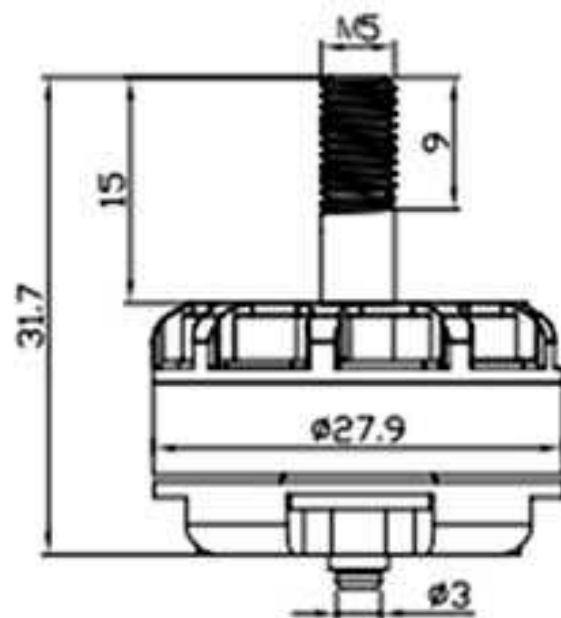

Motor type	The voltage (V)	Paddle size	current (A)	thrust (G)	power (W)	efficiency (G/W)	speed (RPM)
RS2205-2300KV	12	HQ5045 BN	1	62	12.00	5.17	6400
			3	162	36.00	4.50	10080
			5	236	60.00	3.93	12070
			7	311	84.00	3.70	13730
			9.1	374	109.20	3.42	15100
			11	439	132.00	3.33	16320
			13	490	156.00	3.14	17350
			15.3	548	183.60	2.98	18350
			17.3	611	207.60	2.94	19210
			20.7	712	248.40	2.87	20080
	16	HQ5045 BN	1	76	16.00	4.75	7220
			3	183	48.00	3.81	10790
			5	283	80.00	3.54	13030
			7.1	352	113.60	3.10	14720
			9.1	426	145.60	2.93	16180
			11	497	176.00	2.82	17150
			13	560	208.00	2.69	18460
			15	628	240.00	2.62	19270
			17	692	272.00	2.54	20270
			19	754	304.00	2.48	21060
			21	812	336.00	2.42	21840
			23.3	878	372.80	2.36	22590
			25.4	936	406.40	2.30	23210
			27.3	997	436.80	2.28	23920
			29.9	1024	478.40	2.14	24560

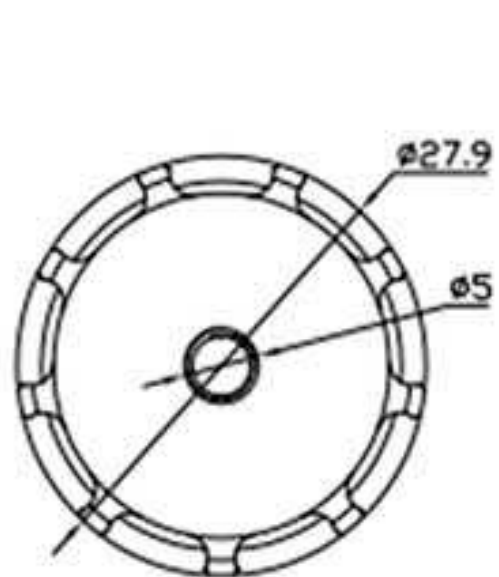

EMAX
COOLING



RS2205



KV=2300

2300KV/CW MADE IN CHINA



